

PRODUCT BROCHURE



JUMBO

SMART | SUSTAINABLE | SAFE
FIBRE CEMENT BOARD

HIGH THICKNESS FIBRE CEMENT BOARD

Welcome to the future of construction and design with our High Thickness Fibre Cement Boards. Crafted to meet the demands of modern architecture, these boards redefine the possibilities of strength, durability, and versatility in your projects.






Jumbo Boards

Build to Last,
Designed to Excel!

HIGH THICKNESS FIBRE CEMENT BOARD

Jumbo's High Thickness Fibre Cement Boards are a versatile and durable solution for a wide range of construction and interior applications. Designed to offer exceptional strength and stability, these boards are resistant to fire, termites, and moisture, ensuring long-lasting performance. Their sound-absorbent and energy-efficient properties enhance comfort while reducing maintenance costs.


Ideal for various spaces such as homes, offices, schools, hospitals, malls, and commercial buildings, these boards provide a reliable, easy-to-install, and eco-friendly alternative to traditional materials like plywood. Jumbo's High Thickness Fibre Cement Boards are crafted to meet the highest standards of safety, durability, and aesthetics, making them a preferred choice for modern construction needs.

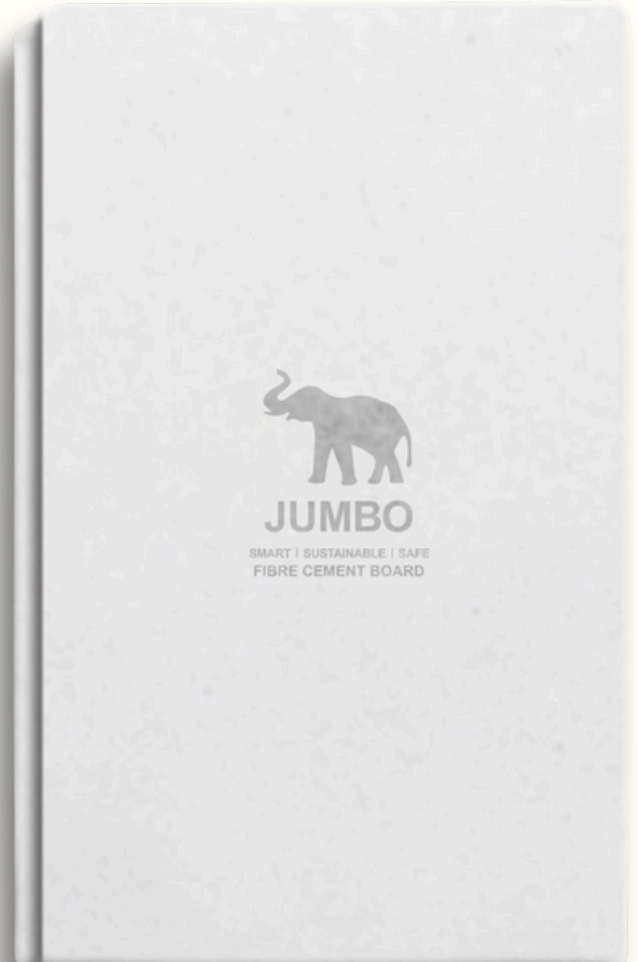

Dimensions

Size: 8 feet × 4 feet

Thickness: 6mm,
8mm, 10mm, 12mm,
16mm, 18mm

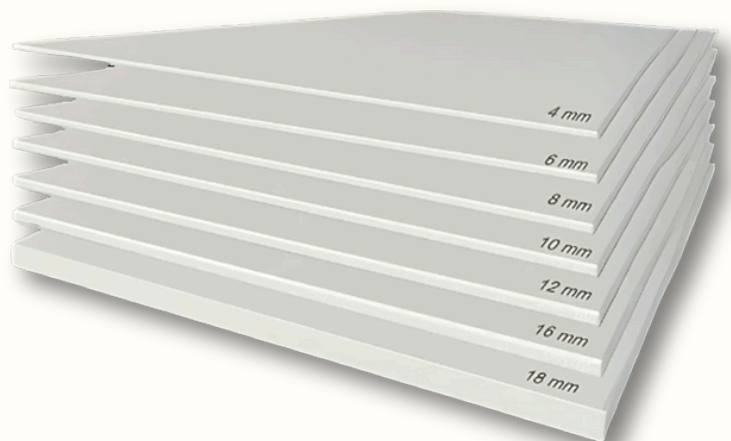

HIGH THICKNESS FIBRE CEMENT BOARD

Key Features

| Key Features | Jumbo board | Plaster board | Plywood |
|--------------------|-------------|---------------|---------|
| Heat Resistant | ★★★★★ | ★★ | ★ |
| Fire Retardant | ★★★★★ | ★ | ★ |
| Moisture Resistant | ★★★★★ | ★ | ★ |
| Termite Proof | ★★★★★ | ★★ | ★★ |
| Noise Insulation | ★★★★★ | ★★★★ | ★★★★ |
| Workability | ★★★★★ | ★★ | ★★ |
| Non Corrosive | ★★★★★ | ★★★ | ★★ |
| Long Lasting | ★★★★★ | ★★ | ★★ |





Technical Properties

| Properties | Unit | Standard | Requirement | Values |
|--------------------------|-------------------|----------|-------------|--------|
| Across Strength | Kg | IS-14862 | - | 18 |
| Parallel Strength | Kg | IS-14862 | - | 12 |
| Modulus of Rupture (MOR) | N/mm ² | IS-14862 | 7.0 (Min) | 10.5 |
| Density (Dry) | Kg/m ³ | IS-14862 | 1100 (Min) | 1200 |
| Moisture Content | % | | - | 6 to 8 |

HIGH THICKNESS FIBRE CEMENT BOARD

Usage

- Partition
- Cladding
- Flooring
- Facade
- Roof Underlay
- Panelling
- Kitchen Counters
- Doors
- Staircases
- Walls

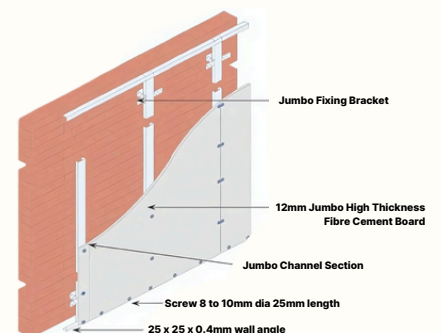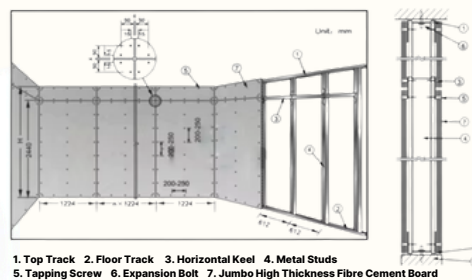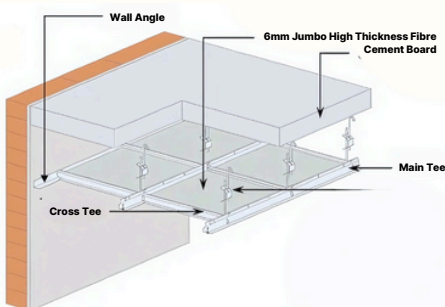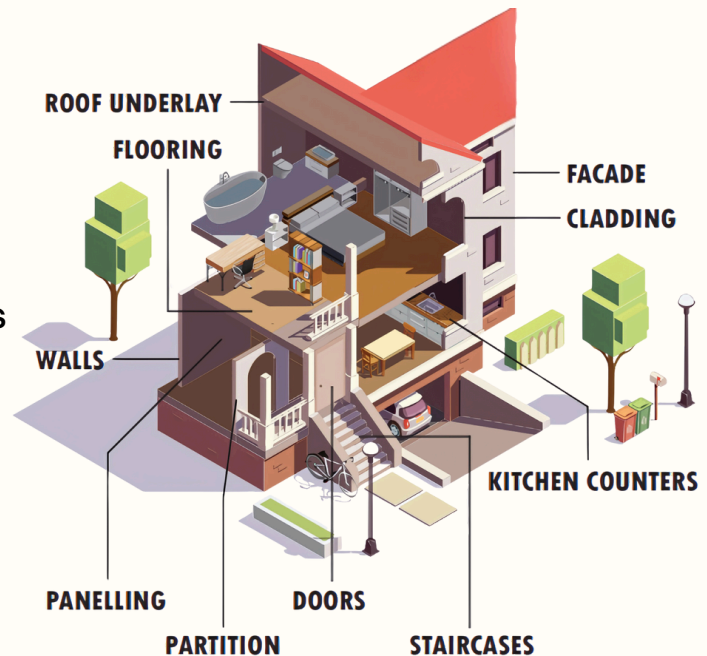

Contact Us




+91 73990 94304



jumboboard.com



jumborooft@gmail.com



JUMBO

SMART | SUSTAINABLE | SAFE
FIBRE CEMENT BOARD

JRT INDUSTRIES LLP

Premium Fibre Cement Board Manufacturer

Scan for



Product Catalogue

Follow Us On



@JumboFibreCementBoard



@jumbo_fibre_cement_board



@Jumbo_Fibre_Cement_Board